
GUIDE SPECIFICATION

Underwalk Pipe shall be rectangular, reinforced fiberglass, as manufactured by Superior Pipe Company, Azusa, California, Pipe shall be manufactured from fiberglass mat, impregnated with polyester resin and hardener. Mat binder shall be silicone oxide. Transition from fiberglass underwalk pipe to another material shall be made with adapter fittings or couplings. Fiberglass pipe and fittings shall be joined by bonded joints or by other approved methods.

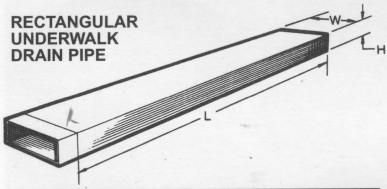


MODEL	SIZE (HxW)	LENGTH	ROUND PIPE EQUIVALENT
RP610-5	3" x 5"	5' 0"	4"
RP910-5	3" x 9"	5' 0"	5"
RP1210-5	3" x 12"	5' 0"	6".
RP1410-5	4" x 14"	5' 0"	8"
RP1610-5	4" x 16"	5' 0"	10"

ALL SIZES ARE O.D.

MODEL	SIZE (HxW)	LENGTH	ROUND PIPE EQUIVALENT
RP-610	3" x 5"	10' 0"	4"
RP-910	3" x 9"	10' 0"	5"
RP-1210	3" x 12"	10' 0"	6"
RP-1410	4" x 14"	10' 0"	8"
RP-1610	4" x 16"	10' 0"	10"

ALL SIZES ARE O.D.

Curb Outlet



MODEL	SIZE (HxW)	ROUND PIPE EQUIVALENT
CO-6	3" x 5"	4"
CO-9	3" x 9"	5"
CO-12	3" x 12"	6"

ALL SIZES ARE I.D.

INSTALLATION INSTRUCTIONS

- 1. Measure and cut the required lengths.
- Clean all the ends to be joined
- Assemble the pipe. Use a coupling to join the fiberglass to other piping materials.
 Use a compatible, waterproof sealant on the fiberglass joints.
- Secure the pipe in place to eliminate the possibility of movement when covering with concrete.
- 3. Excavate a 2" cavity at each joint to allow the concrete to encircle the joint.

MATERIALS

Pipe, adapters and couplings are manufactured from pure, clean fiberglass mat, impregnated with polyester resin and hardener. Mat binder is silicone oxide. It is resistant to most acids, alkalies and other chemicals. This material is inorganic and will not rot or mildew. It is non-toxic and 100% asbestos free.

CITY OF L.A. APPROVAL

Research Report RR5094
AD-6 AD-9 AD-12 AD-14
AD-16 AD-456 AD-459
AD-4512 AD-4514 AD-906
AD-909 AD-9012 AD-9014
C-6 C-9 C-12 C-14 C-16
C-456 C-959 C-4512
C-4516 RP-610 RP-910
RP-1210 RP-1410 RP-1610